

# CALLY PSO COLLECTION

1200x 1800 mm

800x 1600 mm

Granolith Surface\_

Product Catalogue 2024



## A Calypso collection for modern spaces

Get ready to unfold a new avant-garde collection that offers an innovative perspective. The collection speaks of versatile surfaces crafted for modern spaces. It gives you a fresh approach to experiencing modern ceramic excellence.

The collection evokes a sense of timelessness with a natural feel to contemporary living spaces. It offers resilient tiles with versatile character, impressive format, specified details and classy charm. Let your abode indulge in the refined aesthetics of discreet surfaces.

YEARS of EXCELLENCE





## MODERN

Surfaces with endless possibilities

by monolith

The collection is inspired by the charm of terrestrial abundance that sustains varied lives and landforms. It speaks of the earthy charm that is expressed through the magnificent tones and textures.

The surfaces come in four amazing shades that speak of the divine terrestrial aura. It exudes sustainability, naturalness and ingenuity in equal measure. The shades in a way elevate the classy appeal of your space.

Talking about the intrinsic features of the surfaces then it adds resilience to your abode along with durability, aesthetic appeal and functionality. It speaks of various shades of opulence that transcend your abode into an intriguing living space.

Finally, the collection lends innate beauty to the space and leaves room for imagination. It brings the mass-appealing details into vogue leaving any spectator in awe! Let your abode go through the innovative perspective of urbane living and feel the freshness of modernity.

#### Color Range



## SIZES

## Where excellence meet elegance

The astonishing Calypso Collection consist of remarkable surfaces in size 800x1600mm with 9mm thickness. It generates curiosity when applied on interiors as it is equipped with excellent shades and expressive details. The fine craftsmanship can be seen in the marvel sized surfaces.

1200x 1800mm

800x 1600mm

Granolith Surface\_

### NATUREINSPIRED

Taking cues from the asymmetrical forms of nature the collection brings refined and rustic splendor in one.



## PRESENTING

Technically rich ceramic surfaces

## **Glazed Vitrified Tiles**

#### Tile Body

The finest quality raw materials make up the resilient and robust tile body of Monolith tiles.
The raw materials are ethically sourced and sustainably processed.

#### **Engobe Layer**

A highly opacious, fusible, and permeable engobe layer makes the second layer of the tiles of Monolith. The layer makes the tiles highly resistant to water absorption for longevity.

#### High Pigment Digital Printing Ink

The Monolith surfaces get their unique and versatile properties of the design, color, and more in this stage where digital printing is done on the glaze with high pigment ink for excellent results.

#### Glaze Layer

A high-quality glaze coating is added to the engobe layer of the Monolith tiles giving the tile properties of texture and shine and making them ready for design and color.

#### WIDESELECTION

Explore a superior and wide selection of ceramic color bodies.



#### Surfaces loaded with functionalities



#### **EASY TO CLEAN**

The superior glaze of the collection makes the surfaces easy to clean and low maintenance.



#### **STAIN RESISTANT**

Do not worry about spills and stains with the high stain-resistant glaze of the premium Monolith surfaces.



#### **SCRATCH RESISTANT**

Enjoy new-looking surfaces for a very long time with highly scratch and abrasion-resistant surfaces.

## **EXPLORE CLASSY** FEATURES AND VERSATILE APPLICATION

#### **Technical Features:-**



Easy To Maintain



Acids

Resistant To

UV

Resistant To Chemicals



Heat **Prevents Bacterial** Growth Resistant



Non-slip Resistant



Water Proof

Frost

Resistant



M

Dimensional

Stability

Fire

Ecological

#### **Application Areas:-**



Residence

Hotels



Shops



Airports

Offices



Public Places

Malls





## CALYPSO ICE PLEX



Random - 4 Faces












Preview of\_ Calypso Ice & Calypso Ice Plex






#### CALYPSO GRIGIO PLEX

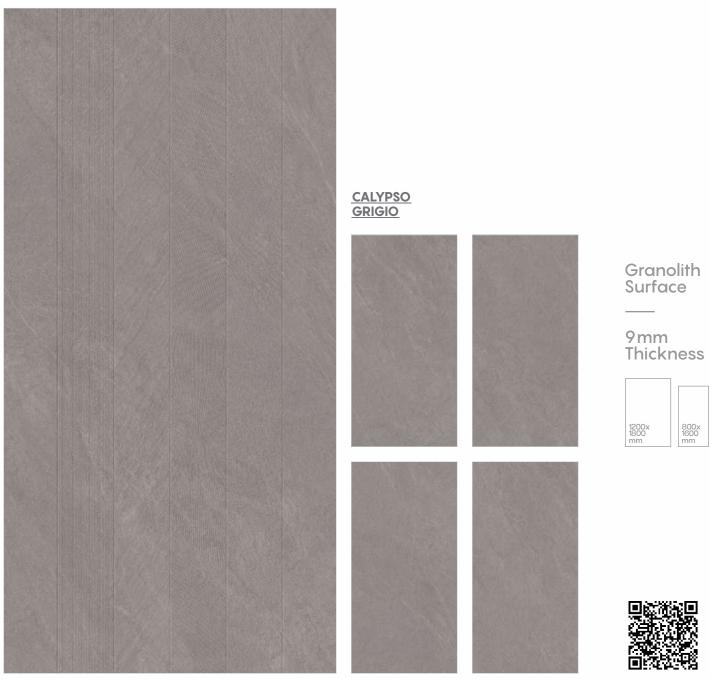

Random - 4 Faces

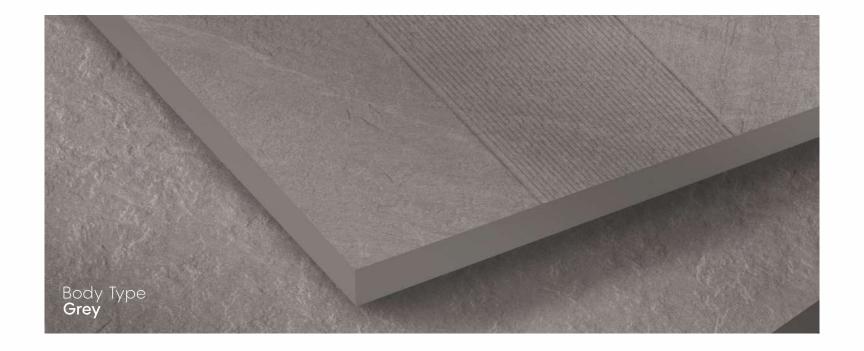







Granolith Surface

9mm Thickness

#### CALYPSO NERO PLEX



Random - 4 Faces









#### CALYPSO BEIGE PLEX





Granolith Surface

9mm Thickness

Touch For Hear Virtual

Random - 4 Faces








## **Technical Specification**

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BIA	MEAN VALUE OF MONOLITH GVT	TEST METHOD			
REGULATORY PROPERTIES						
Deviation in length & width	±0.5 %	±0.2 %	ISO-10545-2			
Deviation in thickness	±5.0 %	±4.0 %	ISO-10545-2			
Straightness in side	±0.5 %	±0.15 %	ISO-10545-2			
Rectangularity	±0.6 %	±0.2 %	ISO-10545-2			
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2			
Color difference	Unaltered	Slight variation is possible due to different batches as per signed samples	ISO-10545-16			
Glossiness	As per mfg	Sharp	GLOSSOMETER			
SURFACE MECHANICAL PROPERTIES						
Water absorption	< 0.50 %	< 0.5 %	ISO-10545-3			
Apparent density	> 2.0 g/cc	> 2.28 gm/mm²	DIN 51082			
MASSIVE MECHANICAL PROPERTIES						
Modulus of rupture	Min. 35 N/mm²	Min. 35 N/mm²	ISO-10545-4			
Breaking strength	Min. 1300 N	Min. 1700 N	ISO-10545-4			
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5			
SURFACE MECHANICAL PROPERTIES						
Surface abrasion resistance	As per mfg	Min. Class-4	ISO-10545-7			
MOH's hardness	As per mfg	Min. 5	EN 101			
THERMO HYGROMETRIC PROPERTIES						
Frost resistance	No damage	No damage	ISO-10545-12			
Thermal shock resistance	No damage	No damage	ISO-10545-9			
Moisture expansion	Nil	0.1 (mm/3)	ISO-10545-10			
Thermal expansion (COE)	Max. 9.0 x 10-6	Max. 6.5 x 10-6	ISO-10545-8			
Crazing resistance	As per mfg	Min. 7 Cycle	ISO-10545-11			
CHEMICAL PROPERTIES						
Chemical resistance	No damage	No damage	ISO-10545-13			
Stain resistance	Resistant	Resistant	ISO-10545-14			

Size	Thickness (approx.)	Pieces / Box	Area / Box	Wt./Box (approx.)
1200x1800mm	9 mm	2 pcs.	4.32 sq. mtr.	92 kgs.
800x1600mm	9 mm	2 pcs.	2.56 sq. mtr.	52 kgs.


### Laying & Levelling







Cement Laying On Tile



Joints



Fixing The Tile



Spacers + Laveller



Lavelling Wedges



After Lavelling Process Leave Int For 8-10 Hrs.



Remove Wedges Ones It Dry



Joint Grouting



Final Cleaning

#### Floor and Wall Installation

- First spread the cement mixer onto the floor and wall substrate.
   At the same time, apply the cement mixer onto the back of the slab with a tile trowel.
   The recommended cement mixer must be spread over in one direction only.
   Using a trowel and follow the same direction as previously applied to the back of the slab.
   Being careful to maintain a minimum joint of 3mm.
   Tab the slab with a rubber trowel for a complete fixing, ensuring the air is expelled.
   It is recommended to start from the centre of the slabs and then move towards the edges.

   Complete the laying operations using a suitable sealant, while keeping at least a 3mm joint through the use of spacers. the use of spacers.
- To make this task easier, use the special device for pulling over the slabs, available in the market.
   Levelling wedges at each linear metre of the slabs are recommended.
   After levelling process leave it for 8-10 hours, remove wedges once it gets dry.



Khokhara Road, Near Hanuman Temple, At Bela, Morbi, INDIA

e. info@monolithsurfaces.com w. monolithsurfaces.com Scan for Catalogue

